


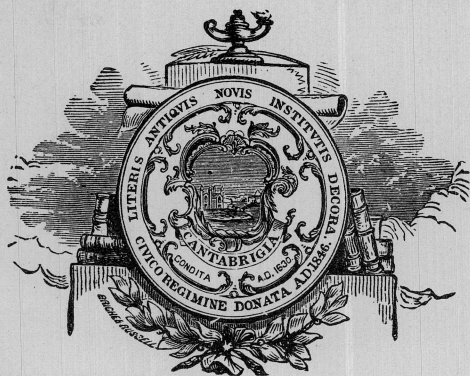

CITY OF CAMBRIDGE.

Office of Superintendent of Streets,

April 11th 1888

To the Committee on Roads and Bridges:

GENTLEMEN:

Pursuant to your instructions I have to report that the *Brick Sidewalk, Edgestown and 4 ft Gutter* on *Hillside Ave.* between in front of land of ~~and~~ *Stillman F. Kelly* petitioned for by *him* and others. will probably require the expenditure of material and labor costing \$ *263.03*, as per the following estimate, to wit:

MATERIAL AND LABOR.	QUANTITY.	COST.
Number of running feet Straight Edgestones,	<i>140</i>	\$ <i>65.80</i>
" " " " Circle Edgestones,		
" " thousand Paving Brick,	<i>4278</i>	<i>55.61</i>
" " " Granite Paving Blocks,		
" " running feet North River Flagstones,		
" " tons Cobble Stone,	<i>20 1/2</i>	<i>49.82</i>
" " Cubic Yards Sand or Gravel,	<i>15 1/2</i>	<i>21.00</i>
" " " " Cracked Stone,		
Cost of Teaming,		
Cost of Labor,		<i>70.80</i>
Total estimated cost,		<i>\$ 263.03</i>

I am very respectfully,

John M. Dorley

Superintendent of Streets

by

ESTIMATE

53

OF COST OF

Brick Sidewalk Edging & Gutter

on Hillside Ave

between in front of land of

and Stillman F. Kelly

PETITIONED FOR BY

Apri. 1888.